




## CLIMATE CONTROL INSTRUCTIONS

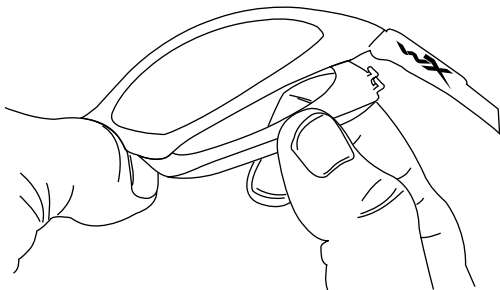

### **Gasket Replacement for Climate Control™ Series**

- 1) Locate hooks or tabs on outside of gasket.
- 2) Locate square shaped holes on inside of frame.  
[next to hinge]
- 3) Push hooks or tabs into holes on one side of frame.  
[Make sure gasket is lined up to match nose bridge]
- 4) Repeat on opposite side of frame.

### **Gasket Removal for Climate Control™ Series**

- 1) Grab outside edge of gasket, below the hinge, and pull straight out. Gasket should release.
- 2) Repeat on opposite side.

**WILEYX USA: 1.800.776.7842 // 925.243.9810 // WILEYX.COM**  
**WILEYX EUROPE LLC: +45 96 93 00 45 // WILEYX.EU**

**COPYRIGHT © 2014 WILEY X, INC. ALL RIGHTS RESERVED.**

WILEY X, WX, BLACK OPS, logos, tag lines and product names are trademarks or registered trademarks (marcas registradas) of Wiley X, Inc. in the U.S. and other countries. Logos © 2007-2014 Wiley X, Inc. All rights reserved.